


8' TO EXIT JUNCTION

ALLIED 233-6201 90° ALLIED 233-4384
Amphenol 3116F- 20-16S


- (A) SOL A GRY
- (B) SOL B BLU
- (C) SOL C GRY/WHT
- (D) SOL D VIO
- (E) SOL E VIO/WHT
- (F) SOL F GRN
- (G) SOL G GRN/YEL
- (H) SOL H PINK

HPD26-24-23SE-L015

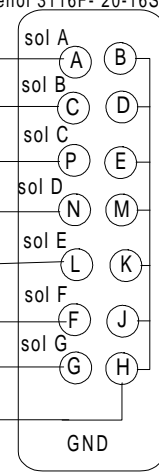

SPLIT 18"

(W) GND BLK




ALLIED 714-6228
Amphenol 3116F/14-5S
ALLIED 233-6116 90°

HOBBS PN76074
PRESSURE SWITCH 60PSI

(L) CONV LOCK WHT/BLK

3 FEET FROM EXIT




(T) TEMP ORG

3 FEET FROM EXIT

(U) TEMP BLK/WHT

TRANS TEMP



ISSPRO 3959-03


(R) WHT/GRN

TWIST

(S) RPM SENSOR WHT/GRN

2 FEET FROM EXIT

MAG PICKUP




ALLIED 714-4004
MS3106A-10SL-4S
CLAMP 714-2560

LOCK B,C,D,F
NEUTRAL ALL SOL OFF

- #1 F,H
- #2 G,H
- #3 C,F
- #4 D,F
- #5 C,G
- #6 D,G
- #7 E,F

NC=NO CONNECT



DWG#: X275	DWG NAME: HARNESS, TRANS A9800 16PIN CONN	DATE: 09/28/07
File: C:\X275\X275HNS TRANS A9800 16PIN CONN	Dwg. By:	
Dwg Not to Scale	Revisions 0	Whitlock Instrument 1300 N. Texas Odessa, Tx 79761 WEB SITE: noflo.com
W.I.Part#	Num. Date:	
Material:	CONTACT: LARRY RITCHIE 432-337-3412 FAX: 432-335-5926 larry@noflo.com	
Tolerance:		